


Alliant Energy's

# Paddock Solar Project

November 2022 update

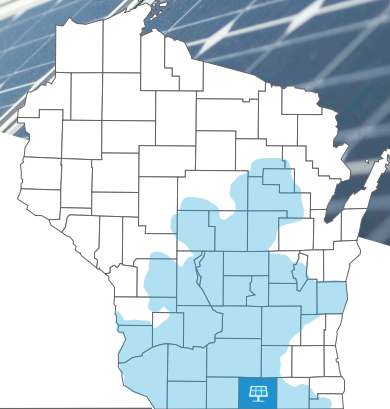

Welcome to Alliant Energy's quarterly construction newsletter! We provide these updates as a courtesy to community members to stay informed of what's happening at the Paddock Solar Project site. In addition to construction updates, these newsletters include other renewable energy stories and site photos. Please visit [alliantenergy.com/paddocksolar](https://alliantenergy.com/paddocksolar) for more information.


The 65-megawatt Paddock Solar Project located in Rock County, Wisconsin, is part of Alliant Energy's **Clean Energy Blueprint**, a strategic roadmap to cost-effectively accelerate our transition to renewable energy and reduce carbon emissions. Once complete, the project will positively impact the environment and generate enough energy to power around 17,000 homes.

## Construction update

Since announcing construction was underway in August, we've begun civil sitework at the Paddock Solar Project. Civil sitework includes setting up the laydown area, building access roads and site grading to ensure the solar panels are at the proper angle to generate energy.

During this time, our crews will install an 8-foot deer fence around the entirety of the project to secure the site.

We've already begun to sow native plant growth and pollinator habitat. Low-growth grasses, which reduce the need for mowing and provide soil health and groundwater benefits, are planted between solar panel arrays. Pollinator habitat grows on the outskirts of the project area. We plant grasses early to allow them to take root and help provide stability for the dirt.

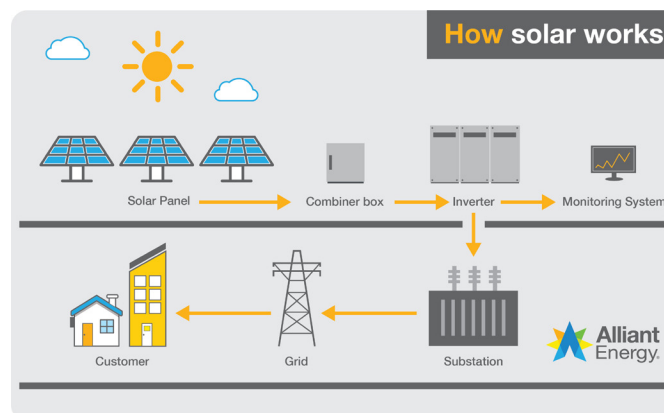

Once the civil sitework is complete, we will be to install the piles. These metal posts anchor the solar arrays to the ground and support the tracking system that allows the panels to follow the sun daily from east to west.

The graphic above shows the steps it takes to get clean energy from the sun's rays to your home.



## What to expect during construction

With construction underway, here is a preview of what you might see in the coming weeks and months.

Bulldozers, scrapers and graders will get their work done early in the project. Pile drivers will drive the 15-foot piles into the ground. Unlike poured concrete footings, these piles can be easily removed at the end of the project's life. Most of the work after that will involve smaller machinery, including forklifts to transport deliveries of solar panels and skid steers for other minor work.

Full-time water trucks are on-site to mitigate dust blowing in the area, and we use a silt fence and filter strips around the project site to contain dust when possible.

Traffic will likely increase on the roads surrounding the solar project. We'll have around 100 workers on-site any given day and regular deliveries of project materials. We documented preconstruction road conditions and will repair any damage construction activities cause.

We'll construct the project substation in parallel with the solar arrays.

**We expect the Paddock Solar Project to be operational late next year.**

### Find out what's next

We'll share additional updates, photos and details for the Paddock Solar Project throughout the construction process online at [alliantenergy.com/paddocksolar](http://alliantenergy.com/paddocksolar).

### Sign up for email


Sign up to receive our updates via email. They're better for the environment than print newsletters because they reduce paper waste and carbon emissions. Plus, you'll get updates faster! Contact [solar@alliantenergy.com](mailto:solar@alliantenergy.com) to request newsletter e-delivery.



Grading has begun at the Paddock Solar Project.



Piles and racking fully installed and await solar panels (Wood County Solar Project, Wood County, WI).

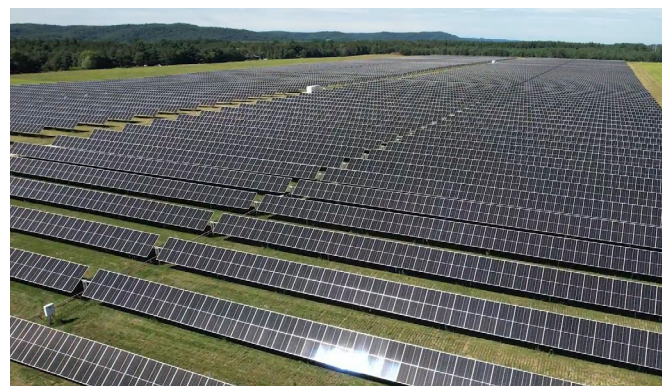

The final look of a solar project once complete (Bear Creek Solar Project, Richland County, WI).